

A300RW Series

Wide Input Range, 3W Single & Dual Output DC/DC Converters



Key Features:

- 3W Output Power
- EN 60950 Approved (UL)
- 2:1 Input Voltage Range
- 1,500 VDC Isolation
- Compact DIP Case
- Single & Dual Outputs
- 28 Standard Models
- 1.0 MH MTBF
- Industry Standard Pin-Out



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Start Voltage	5 VDC Input	3.5	4.0	4.5	VDC
	12 VDC Input	4.5	7.0	9.0	
	24 VDC Input	8.0	12.0	18.0	
	48 VDC Input	16.0	24.0	36.0	
Input Filter	Ω (Pi) Filter				
Reverse Polarity Input Current				1.0	A
Short Circuit Input Power			1,000	2,000	mW

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±0.5	±1.0	%
Output Voltage Balance	Dual Output , Balanced Loads		±0.5	±2.0	%
Line Regulation	Vin = Min to Max		±0.2	±0.5	%
Load Regulation	Iout = 10% to 100%		±0.2	±0.5	%
Ripple & Noise (20 MHz)	See Note 1		45	60	mV P - P
Ripple & Noise (20 MHz)	Over Line, Load & Temp.			100	mV P - P
Ripple & Noise (20 MHz)				15	mV rms
Output Power Protection		120			%
Transient Recovery Time, See Note 2	50% Load Step Change		300	500	μSec
Transient Response Deviation			±3.0	±5.0	%
Temperature Coefficient			±0.01	±0.02	%/°C
Output Short Circuit	Continuous (Autorecover)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,500			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		65	100	pF
Switching Frequency			300		kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+71	°C
Operating Temperature Range	Case			+90	°C
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	1.25 x 0.80 x 0.40 Inches (31.8 x 20.3 x 10.2 mm)				
Case Material	Non-Conductive Black Plastic (UL-94V0)				
Weight	0.42 Oz (12g)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.0			MHours
Safety Standards	UL 60950, EN 60950				
Safety Approvals	UL, cUL; File No. E245422				

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		11.0	VDC
	12 VDC Input	-0.7		25.0	
	24 VDC Input	-0.7		50.0	
	48 VDC Input	-0.7		100.0	
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C
Internal Power Dissipation	All Models			2,500	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com




www.micropowerdirect.com

Model Number	Input				Reflected Ripple Current (mA, Typ)	Output			Efficiency (% Typ)	Capacitive Load (µF Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)			Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load							
A301RW	5	4.5 - 9.0	566	40	100	3.3	600.0	60.0	70	4,000	1,500
A302RW	5	4.5 - 9.0	685	40	100	5.0	500.0	50.0	73	4,000	1,500
A303RW	5	4.5 - 9.0	779	40	100	12.0	250.0	25.0	77	4,000	1,500
A304RW	5	4.5 - 9.0	779	40	100	15.0	200.0	20.0	77	4,000	1,500
A305RW	5	4.5 - 9.0	694	40	100	±5.0	±250.0	±25.0	72	±1,000	1,500
A306RW	5	4.5 - 9.0	800	40	100	±12.0	±125.0	±12.5	75	±1,000	1,500
A307RW	5	4.5 - 9.0	800	40	100	±15.0	±100.0	±10.0	75	±1,000	1,500
A311RW	12	9.0 - 18.0	223	20	30	3.3	600.0	60.0	74	4,000	700
A312RW	12	9.0 - 18.0	267	20	30	5.0	500.0	50.0	78	4,000	700
A313RW	12	9.0 - 18.0	305	20	30	12.0	250.0	25.0	82	4,000	700
A314RW	12	9.0 - 18.0	305	20	30	15.0	200.0	20.0	82	4,000	700
A315RW	12	9.0 - 18.0	271	20	30	±5.0	±250.0	±25.0	77	±1,000	700
A316RW	12	9.0 - 18.0	313	20	30	±12.0	±125.0	±12.5	80	±1,000	700
A317RW	12	9.0 - 18.0	313	20	30	±15.0	±100.0	±10.0	80	±1,000	700
A321RW	24	18.0 - 36.0	109	5	15	3.3	600.0	60.0	76	4,000	350
A322RW	24	18.0 - 36.0	132	5	15	5.0	500.0	50.0	79	4,000	350
A323RW	24	18.0 - 36.0	149	5	15	12.0	250.0	25.0	84	4,000	350
A324RW	24	18.0 - 36.0	149	5	15	15.0	200.0	20.0	84	4,000	350
A325RW	24	18.0 - 36.0	132	5	15	±5.0	±250.0	±25.0	79	±1,000	350
A326RW	24	18.0 - 36.0	152	5	15	±12.0	±125.0	±12.5	82	±1,000	350
A327RW	24	18.0 - 36.0	152	5	15	±15.0	±100.0	±10.0	82	±1,000	350
A331RW	48	36.0 - 75.0	55	3	10	3.3	600.0	60.0	76	4,000	135
A332RW	48	36.0 - 75.0	66	3	10	5.0	500.0	50.0	79	4,000	135
A333RW	48	36.0 - 75.0	75	3	10	12.0	250.0	25.0	84	4,000	135
A334RW	48	36.0 - 75.0	75	3	10	15.0	200.0	20.0	84	4,000	135
A335RW	48	36.0 - 75.0	65	3	10	±5.0	±250.0	±25.0	80	±1,000	135
A336RW	48	36.0 - 75.0	75	3	10	±12.0	±125.0	±12.5	84	±1,000	135
A337RW	48	36.0 - 75.0	75	3	10	±15.0	±100.0	±10.0	84	±1,000	135

Notes:


- When measuring output ripple, it is recommended that an external 0.47 µF ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units. For noise sensitive applications, the use of 3.3 µF capacitors will reduce the output ripple.
- Transient recovery is measured to within a 1% error band for a load step change of 75% to 100%.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- Dual output units may be connected to provide a 10 VDC, 24 VDC or 30 VDC output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common.
- The converter should be connected to a low ac-impedance source. An input source with a highly inductive impedance may affect the stability of the converter. In applications where the converter output loading is high and input power is supplied over long lines, it may be necessary to use a capacitor on the input to insure start-up. In this case, it is recommended that a low ESR (ESR <1.0Ω at 100 kHz) capacitor be mounted close to the converter. For 5V input units a 8.2 µF is recommended, for 12V input units, a 3.3 µF; and for 24V & 48V units a 2.2 µF.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

Mechanical Dimensions

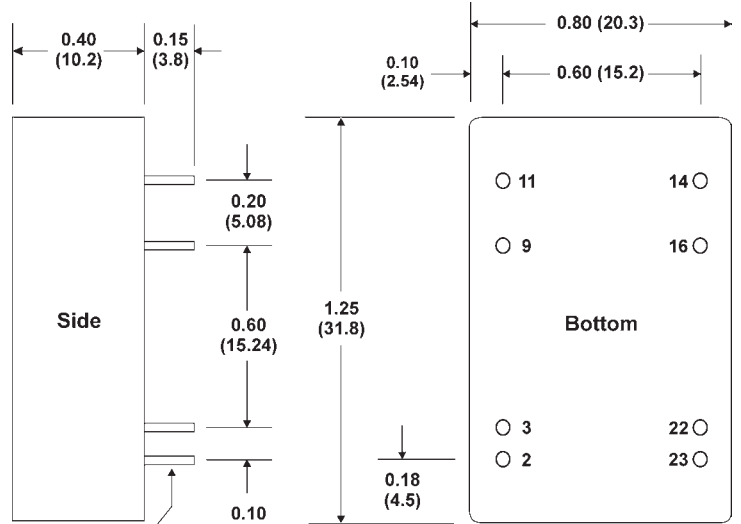

- Mechanical Notes:**
- All dimensions are typical in inches (mm)
 - Tolerance x.xx = ±0.01 (±0.25)

Derating Curve

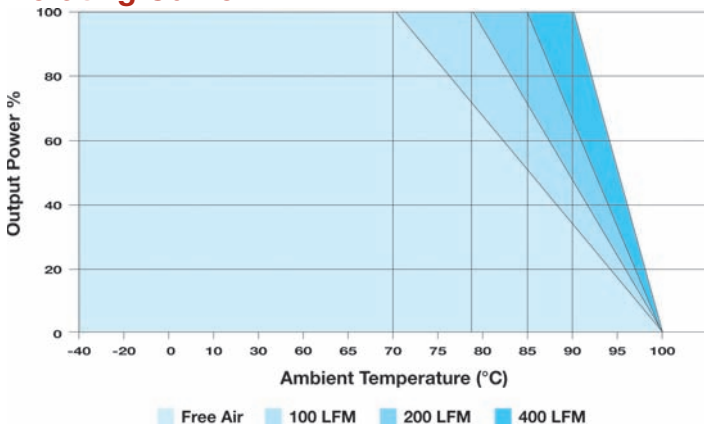

Pin Connections

Pin	Single	Dual	Pin	Single	Dual
2, 3	-Vin	-Vin	14	+Vout	+Vout
9	No Pin	Common	16	-Vout	Common
11	NC	-Vout	22, 23	+Vin	+Vin

NC: No Connection



MicroPower Direct
We Power Your Success - For Less!