

A500RU Series

Ultra-Wide Input, 5W Single & Dual Output DC/DC Converters



Key Features:

- 5W Output Power
- 4:1 Input Voltage Range
- 1,500 VDC Isolation
- Meets EN55022 Class "A"
- Compact DIP Case
- Single & Dual Outputs
- 1.0 MH MTBF
- Industry Standard Pin-Out



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|--------------------------------|---|------|------|-------|-------|
| Input Start Voltage | 24 VDC Input | 7.0 | 8.0 | 9.0 | VDC |
| | 48 VDC Input | 14.0 | 16.0 | 18.0 | |
| Input Filter | π (Pi) Filter (Complies with EN55022 Class "A") | | | | |
| Reverse Polarity Input Current | | | | 1.0 | A |
| Short Circuit Input Power | | | | 2,500 | mW |

Output

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-------------------------------------|------------------------------|------|-------|-------|----------|
| Output Voltage Accuracy | | | ±0.5 | ±1.0 | % |
| Output Voltage Balance | Dual Output , Balanced Loads | | ±0.5 | ±1.0 | % |
| Line Regulation | Vin = Min to Max | | ±0.1 | ±0.3 | % |
| Load Regulation | Iout = 10% to 100% | | ±0.3 | ±1.0 | % |
| Ripple & Noise (20 MHz) | See Note 1 | | 50 | 75 | mV P - P |
| Ripple & Noise (20 MHz) | Over Line, Load & Temp. | | | 100 | mV P - P |
| Ripple & Noise (20 MHz) | | | | 15 | mV rms |
| Output Power Protection | | 110 | | 350 | % |
| Transient Recovery Time, See Note 2 | 25% Load Step Change | | 250 | 500 | μSec |
| Transient Response Deviation | | | ±3.0 | | |
| Temperature Coefficient | | | ±0.01 | ±0.02 | %/°C |
| Output Short Circuit | Continuous | | | | |

General

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-----------------------|-------------|-------|------|------|-------|
| Isolation Voltage | 60 Seconds | 1,500 | | | VDC |
| Isolation Resistance | 500 VDC | 1,000 | | | MΩ |
| Isolation Capacitance | 100 kHz, 1V | | 350 | 550 | pF |
| Switching Frequency | | | 340 | | kHz |

Environmental

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-----------------------------|------------------------------|------|------|------|-------|
| Operating Temperature Range | Ambient | -40 | | +71 | °C |
| Operating Temperature Range | Case | | | +90 | °C |
| Storage Temperature Range | | -40 | | +125 | °C |
| Cooling | Free Air Convection | | | | |
| Humidity | RH, Non-condensing | | 90 | | % |
| RFI | Six-Side Shielded Metal Case | | | | |
| Conducted EMI | EN55022 Class "A" | | | | |

Physical

| | |
|---------------|---|
| Case Size | 1.25 x 0.80 x 0.40 Inches (31.8 x 20.3 x 10.2 mm) |
| Case Material | Metal With Non-Conductive Base |
| Weight | 0.49 Oz (14g) |

Reliability Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-----------|---------------------------------|------|------|------|--------|
| MTBF | MIL HDBK 217F, 25°C, Gnd Benign | 1.0 | | | MHours |

Absolute Maximum Ratings

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-----------------------------|-----------------------------|------|------|-------|-------|
| Input Voltage Surge (1 Sec) | 24 VDC Input | -0.7 | | 50.0 | VDC |
| | 48 VDC Input | -0.7 | | 100.0 | |
| Lead Temperature | 1.5 mm From Case For 10 Sec | | | 260 | °C |
| Internal Power Dissipation | All Models | | | 2,500 | mW |

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerdirect.com

W: www.micropowerdirect.com




www.micropowerdirect.com

| Model Number | Input Voltage (VDC) | | Current (mA) | | Reflected Ripple Current (mA, Typ) | Output | | | Efficiency (% Typ) | Capacitive Load (μ F Max) | Fuse Rating Slow-Blow (mA) |
|--------------|---------------------|-------------|--------------|---------|------------------------------------|---------------|-------------------|-------------------|--------------------|--------------------------------|----------------------------|
| | Nominal | Range | Full-Load | No-Load | | Voltage (VDC) | Current (mA, Max) | Current (mA, Min) | | | |
| | | | | | | | | | | | |
| A501RU | 24 | 9.0 - 36.0 | 212 | 20 | 10 | 3.3 | 1,200 | 120.0 | 78 | 3,000 | 1,500 |
| A502RU | 24 | 9.0 - 36.0 | 257 | 20 | 10 | 5.0 | 1,000 | 100.0 | 81 | 3,000 | 1,500 |
| A503RU | 24 | 9.0 - 36.0 | 291 | 20 | 10 | 12.0 | 500 | 50.0 | 86 | 3,000 | 1,500 |
| A504RU | 24 | 9.0 - 36.0 | 294 | 20 | 10 | 15.0 | 400 | 40.0 | 85 | 3,000 | 1,500 |
| A505RU | 24 | 9.0 - 36.0 | 257 | 20 | 10 | \pm 5.0 | \pm 500 | \pm 50.0 | 81 | \pm 680 | 1,500 |
| A506RU | 24 | 9.0 - 36.0 | 291 | 20 | 10 | \pm 12.0 | \pm 250 | \pm 25.0 | 86 | \pm 680 | 1,500 |
| A507RU | 24 | 9.0 - 36.0 | 294 | 20 | 10 | \pm 15.0 | \pm 200 | \pm 20.0 | 85 | \pm 680 | 1,500 |
| A511RU | 48 | 18.0 - 75.0 | 106 | 10 | 10 | 3.3 | 1,200 | 120.0 | 78 | 3,000 | 750 |
| A512RU | 48 | 18.0 - 75.0 | 129 | 10 | 10 | 5.0 | 1,000 | 100.0 | 81 | 3,000 | 750 |
| A513RU | 48 | 18.0 - 75.0 | 145 | 10 | 10 | 12.0 | 500 | 50.0 | 86 | 3,000 | 750 |
| A514RU | 48 | 18.0 - 75.0 | 147 | 10 | 10 | 15.0 | 400 | 40.0 | 85 | 3,000 | 750 |
| A515RU | 48 | 18.0 - 75.0 | 123 | 10 | 10 | \pm 5.0 | \pm 500 | \pm 50.0 | 81 | \pm 680 | 750 |
| A516RU | 48 | 18.0 - 75.0 | 145 | 10 | 10 | \pm 12.0 | \pm 250 | \pm 25.0 | 86 | \pm 680 | 750 |
| A517RU | 48 | 18.0 - 75.0 | 147 | 10 | 10 | \pm 15.0 | \pm 200 | \pm 20.0 | 85 | \pm 680 | 750 |

Notes:

- When measuring output ripple, it is recommended that an external 0.47 μ F ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units. For noise sensitive applications, the use of 3.3 μ F capacitors will reduce the output ripple.
- Transient recovery is measured to within a 1% error band for a load step change of 75% to 100%.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- Dual output units may be connected to provide a 10, 24 or 30 VDC output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common.
- The converter should be connected to a low ac-impedance source. An input source with a highly inductive impedance may affect the converter stability. In applications where the converter output loading is high and input power is supplied over long lines, it may be necessary to use a capacitor on the input to insure start-up. In this case, it is recommended that a low ESR (ESR <1.0 Ω at 100 kHz) capacitor be mounted close to the converter. For 24V input units a 4.7 μ F is recommended and for 48V units a 2.2 μ F.
- It is always recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

Derating Curve

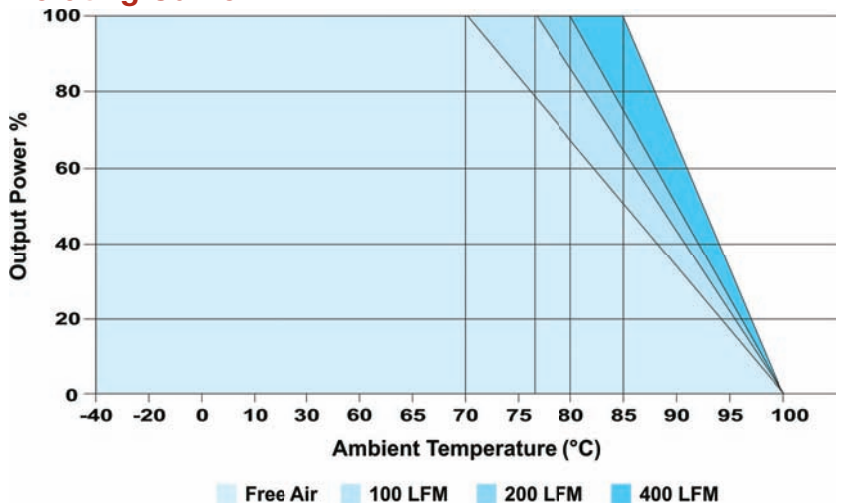


Pin Connections

| Pin | Single | Dual |
|--------|--------|--------|
| 2, 3 | -Vin | -Vin |
| 9 | No Pin | Common |
| 11 | NC | -Vout |
| 14 | +Vout | +Vout |
| 16 | -Vout | Common |
| 22, 23 | +Vin | +Vin |

NC: No Connection

Mechanical Dimensions

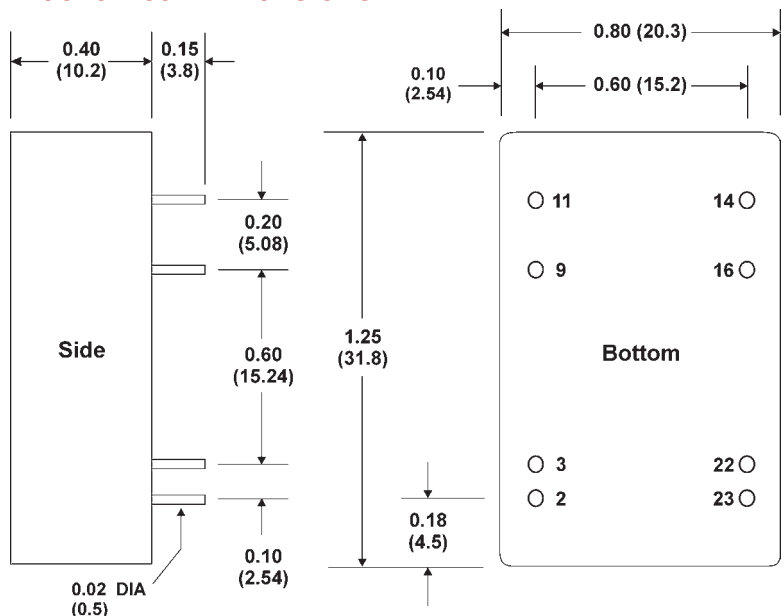

Mechanical Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = \pm 0.01 (\pm 0.25)



MicroPower Direct
We Power Your Success - For Less!