


MD900xRW Series

2:1 Input, 9W SIP, Single & Dual Output DC/DC Converters

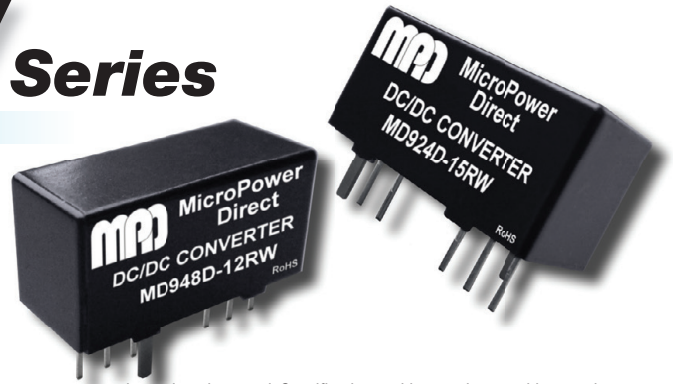

Key Features:

- 9W Output Power
- Miniature SIP Case
- 2:1 Input Voltage Range
- Short Circuit Protected
- 1,600 VDC Isolation
- Efficiency To 90%
- Over Voltage Protection
- Over Current Protection
- -40°C to +85°C Operation
- Industry Standard Pin-Out
- Low Cost



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Range	12 VDC Input	9.0	12.0	18.0	VDC	
	24 VDC Input	18.0	24.0	36.0		
	48 VDC Input	36.0	48.0	75.0		
Under Voltage Lockout	12 VDC Input		7.0	8.9	VDC	
	24 VDC Input		13.0	16.0		
Start Up Time	See Note 2		50.0		mS	
Input Filter	Capacitor Filter					
Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage Accuracy				±1.0	%	
Line Regulation	V _{IN} = Min to Max			±0.2	%	
Load Regulation, See Note 3	Single Output Models			±0.5	%	
	Dual Output Models			±1.0	%	
Cross Regulation	See Note 4			±5.0	%	
Ripple & Noise (20 MHz)	See Note 5		75		mV P - P	
Transient Recovery Time, See Note 6	25% Load Step Change		250		µSec	
Transient Response Deviation				±3.0	%	
Temperature Coefficient				±0.02	%/°C	
Over Voltage Protection			130		%	
Over Current Protection			150		%	
Output Short Circuit	Continuous (Autorecovery)					
General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage, See Note 7	Input to Output	1,600			VDC	
	Case To Input or Output	1,000				
Isolation Resistance					MΩ	
Isolation Capacitance				50	pF	
Switching Frequency	12, 24 V _{IN} Models		400		kHz	
	48 V _{IN} Models		500			
EMI Characteristics						
Parameter	Standard	Criteria	Level			
Radiated Emissions, See Note 8	EN 55032		Class A			
Conducted Emissions, See Note 8	EN 55032		Class A			
ESD	EN 61000-4-2	B	±6 kV Contact, ±8 kV Air			
RS	EN 61000-4-3	A	20V/rms			
EFT, See Note 9	EN 61000-4-4	A	±2 kV			
Surge, See Note 10	EN 61000-4-5	A	±2 kV			
CS	EN 61000-4-6	A	10 Vrms			
PFMF	EN 61000-4-8	A	100 A/m			
Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	-40	+25	+85	°C	
	Case			+100		
Storage Temperature Range		-55		+125	°C	
Cooling	Free Air Convection					
Humidity	RH, Non-condensing			95	%	
Physical						
Case Size	See Mechanical Diagram (Page 4)					
Case Material	Black, Anodized Copper (UL94-V0)					
Weight	0.25 Oz (7.3g)					
Reliability Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	900			kHours	
Absolute Maximum Ratings						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Surge (1 Sec)	12 VDC Input			25	VDC	
	24 VDC Input			50.0		
	48 VDC Input			100.0		
Lead Temperature	1.5 mm From Case for 10 Sec			260	°C	

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



www.micropowerdirect.com

Model Selection Guide

Model Number	Input				Reflected Ripple Current (mA P-P, Max)	Output			Efficiency (% Typ)	Capacitive Load (µF, Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)			Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load							
MD912S-03RW	12	9.0 - 18.0	679	15	30	3.3	2,000	0.0	81	2,600	2,000
MD912S-05RW	12	9.0 - 18.0	784	15	30	5.0	1,600	0.0	85	1,300	2,000
MD912S-09RW	12	9.0 - 18.0	862	15	30	9.0	1,000	0.0	87	800	2,000
MD912S-12RW	12	9.0 - 18.0	852	15	30	12.0	750	0.0	88	560	2,000
MD912S-15RW	12	9.0 - 18.0	843	15	30	15.0	600	0.0	89	560	2,000
MD912S-24RW	12	9.0 - 18.0	843	15	30	24.0	375	0.0	89	200	2,000
MD912D-05RW	12	9.0 - 18.0	784	15	30	±5.0	±800	±0.0	85	800	2,000
MD912D-12RW	12	9.0 - 18.0	852	15	30	±12.0	±375	±0.0	88	390	2,000
MD912D-15RW	12	9.0 - 18.0	843	15	30	±15.0	±300	±0.0	89	200	2,000
MD924S-03RW	24	18.0 - 36.0	335	15	30	3.3	2,000	0.0	82	2,600	1,000
MD924S-05RW	24	18.0 - 36.0	392	15	30	5.0	1,600	0.0	85	1,300	1,000
MD924S-09RW	24	18.0 - 36.0	426	15	30	9.0	1,000	0.0	88	800	1,000
MD924S-12RW	24	18.0 - 36.0	421	15	30	12.0	750	0.0	89	560	1,000
MD924S-15RW	24	18.0 - 36.0	417	15	30	15.0	600	0.0	90	560	1,000
MD924S-24RW	24	18.0 - 36.0	417	15	30	24.0	375	0.0	90	200	1,000
MD924D-05RW	24	18.0 - 36.0	388	15	30	±5.0	±800	±0.0	86	800	1,000
MD924D-12RW	24	18.0 - 36.0	421	15	30	±12.0	±375	±0.0	89	390	1,000
MD924D-15RW	24	18.0 - 36.0	431	15	30	±15.0	±300	±0.0	87	200	1,000
MD948S-03RW	48	36.0 - 75.0	168	10	30	3.3	2,000	0.0	82	2,600	500
MD948S-05RW	48	36.0 - 75.0	196	10	30	5.0	1,600	0.0	85	1,300	500
MD948S-09RW	48	36.0 - 75.0	213	10	30	9.0	1,000	0.0	88	800	500
MD948S-12RW	48	36.0 - 75.0	211	10	30	12.0	750	0.0	89	560	500
MD948S-15RW	48	36.0 - 75.0	211	10	30	15.0	600	0.0	89	560	500
MD948S-24RW	48	36.0 - 75.0	211	10	30	24.0	375	0.0	89	200	500
MD948D-05RW	48	36.0 - 75.0	194	10	30	±5.0	±800	±0.0	86	800	500
MD948D-12RW	48	36.0 - 75.0	216	10	30	±12.0	±375	±0.0	87	390	500
MD948D-15RW	48	36.0 - 75.0	216	10	30	±15.0	±300	±0.0	87	200	500

4:1 Input Models Are Also Available See The MD900xRU


Notes:

- The specified maximum capacitive load is for each output.
- Start up time is specified at the nominal Voltage input and with a constant resistive load.
- Load regulation is specified for a load change of 0% to 100%. For 3.3VDC output models, the load regulation is ±1.0% Max.
- Cross regulation is specified with one output at full load while the other output is varied from 25% to 100% load.
- Output ripple is measured with a 1 µF ceramic capacitor and a 10 µF electrolytic capacitor connected in parallel.
- Transient recovery is measured to within a 1% error band for a load step change of 25%. Single 3.3 VDC output models have a response deviation of ±5.0% Max.
- Isolation voltage ratings are for 60 seconds.
- With the addition of external filter and protection components, all models will meet the requirements of EN 55032 class A. Suggested input circuits are shown in the connection diagrams on page 3. Contact the factory for more information.
- To meet the requirements of EN 61000-4-4 (±2 kV), external components are needed. The connection diagrams on page 3 shows external components that would typically achieve this. Contact the factory for more information.
- To meet the requirements of EN 61000-4-5 (±2 kV), external components are needed. This can be done as shown in the connection diagrams on page 3. Contact the factory for more information.
- Operation at no-load will not damage the unit, but they may not meet all specifications.
- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.


The MD900x-RW may be started or shutdown by the control pin input (pin 3). This input is current controlled. The unit operates when this input is left open. When the input is "high" (current is flowing into the pin), the converter shuts down. The input current to this pin must be kept between 2 mA to 4 mA.

The diagram at right shows a simple input circuit for the control pin. Closing the switch causes 2 - 4 mA to flow through the 1 kΩ resistor, shutting the unit off.

Derating Curve

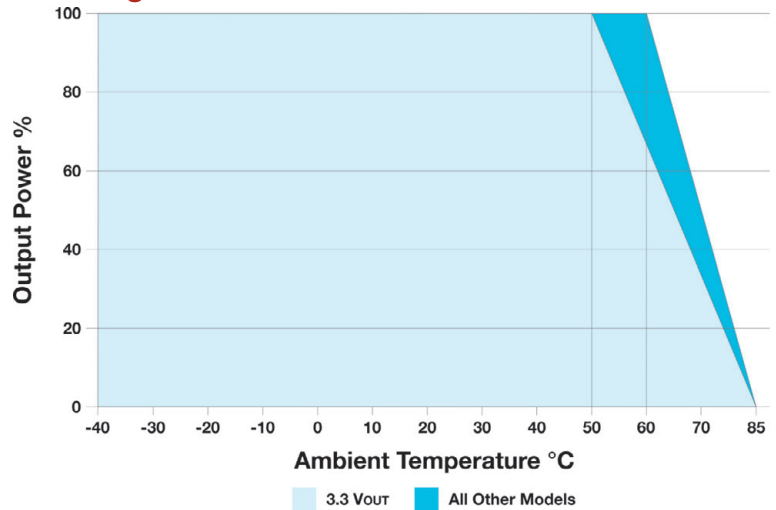

Remote ON/OFF Control

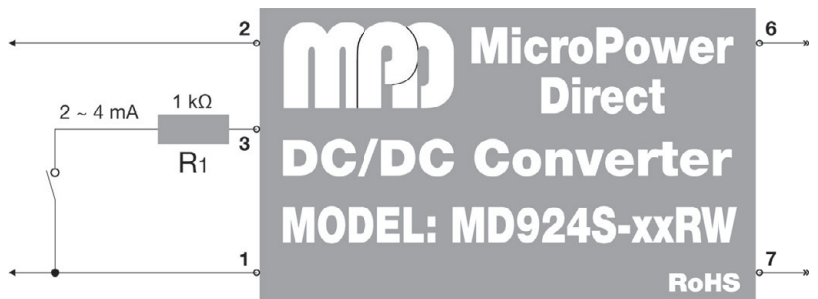

For applications that require meeting EMC standards, the diagrams below illustrate typical connections of the MD900xxRW models (12 VIN models are on page 4). Some notes on this diagram (starting with the input circuit) are:


1. An external fuse should be used in all power module applications. The recommended fuse is shown in the model chart on page 2.
2. To protect against voltage spikes, it is recommended that a TVS be used on the input. A suggested value is given in the tables below.

Recommended component values are:


Component	Value
C1	330 μ F/100V
TVS	3KW, 120V
C2, C3	1210 475K/100V
L1	10 μ H
C4, C5	1808 102K/3kV
C6	1808 221K/3kV
C7	10 μ F
C8	1 μ F

3. The output filtering components C7 & C9 are high frequency, low ESR electrolytic capacitors. Capacitors C8 & C10 are ceramic. Care must be taken in choosing these capacitors not to exceed the capacitive load specification for the unit. Voltage derating of capacitors should be 80% or above.

Typical Connection: 48 VIN, Single Output Models

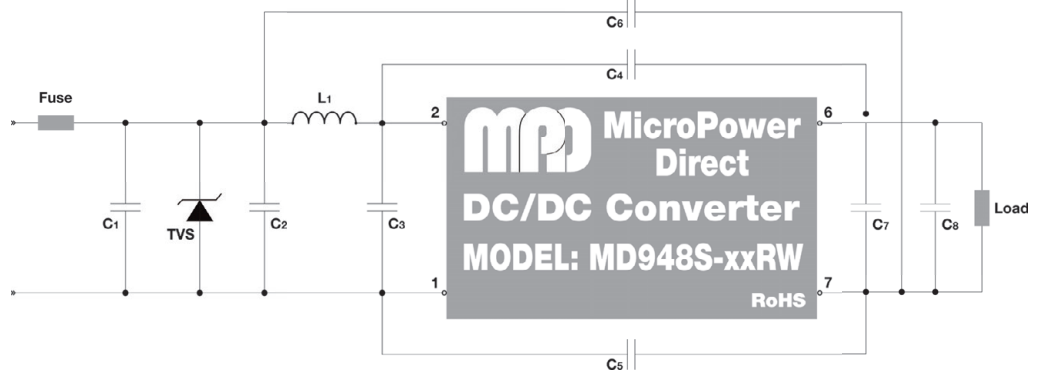


Typical Connection: 48 VIN, Dual Output Models

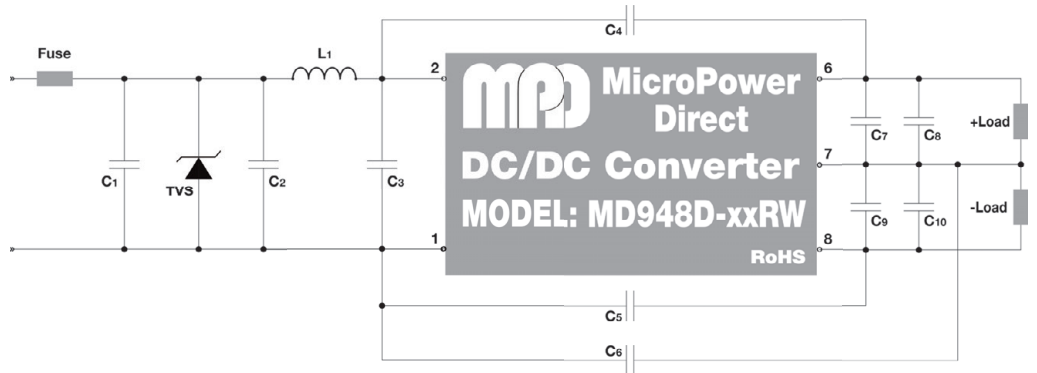


Component	Value
C1	330 μ F/100V
TVS	3KW, 120V
C2, C3	1210 475K/100V
L1	10 μ H
C4, C5	1808 102K/3kV
C6	1808 221K/3kV
C7, C9	10 μ F
C8, C10	1 μ F

Typical Connection: 24 VIN, Single Output Models

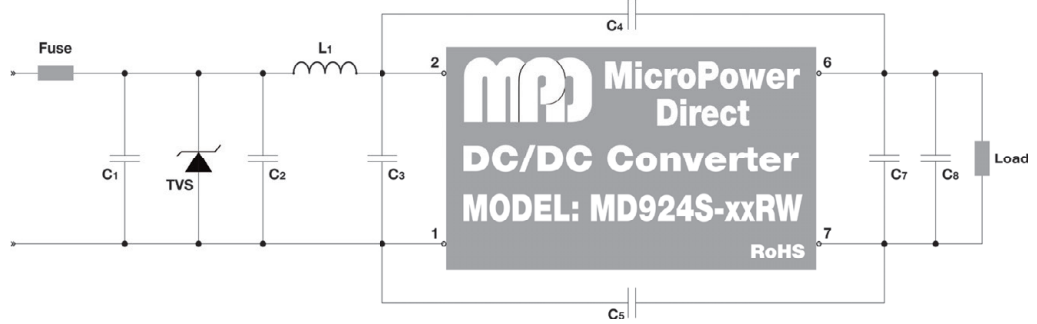

Component	Value
C1	330 μ F/100V
TVS	3KW, 70V
C2, C3	1210 475K/100V
L1	10 μ H
C4, C5	1808 102K/3kV
C7	10 μ F
C8	1 μ F


Typical Connection: 24 VIN, Dual Output Models

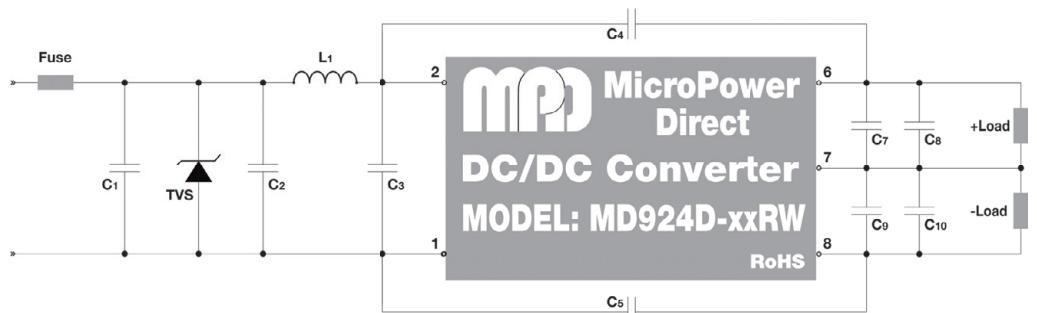

Component	Value
C1	330 μ F/100V
TVS	3KW, 70V
C2, C3	1210 475K/100V
L1	10 μ H
C4, C5	1808 102K/3kV
C7, C9	10 μ F
C8, C10	1 μ F


Typical Connection: 12 VIN, Single Output Models

Component	Value
C1	330 μ F/100V
TVS	3KW, 26V
C2	1210 106M/35V
L1	3.3 μ H
C4, C5	1808 102K/3kV
C7	10 μ F
C8	1 μ F

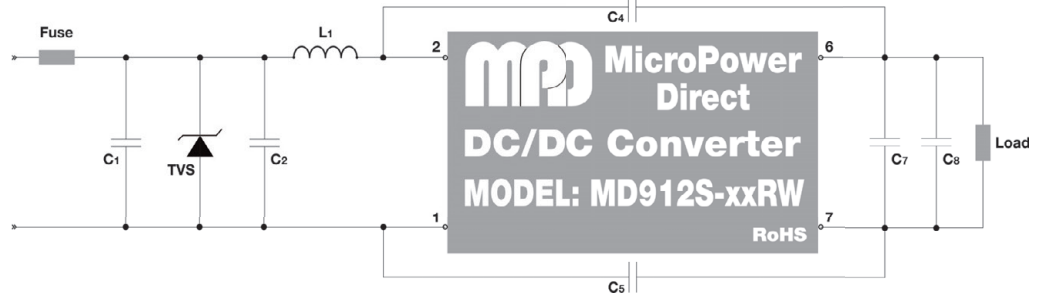


Typical Connection: 12 VIN, Dual Output Models

Component	Value
C1	330 μ F/100V
TVS	3KW, 26V
C2	1210 106M/100V
L1	3.3 μ H
C4, C5	1808 102K/3kV
C7, C9	10 μ F
C8, C10	1 μ F

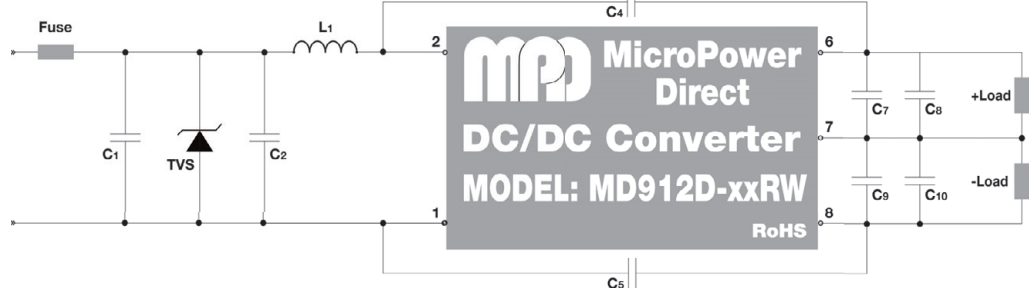

Mechanical Dimensions

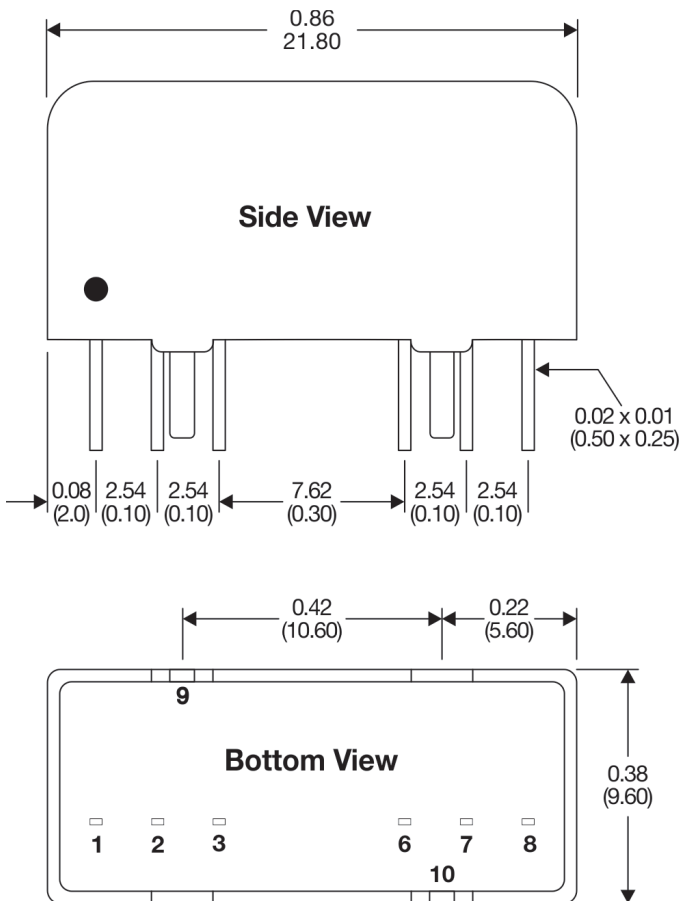


Pin Connections

Pin	Single Output
1	-VIN
2	+VIN
3	Remote On/Off
6	+VOUT
7	-VOUT
8	No Connection
9	Case
10	Case

Pin	Dual Output
1	-VIN
2	+VIN
3	Remote On/Off
6	+VOUT
7	Common
8	-VOUT
9	Case
10	Case

Case Ground Tab

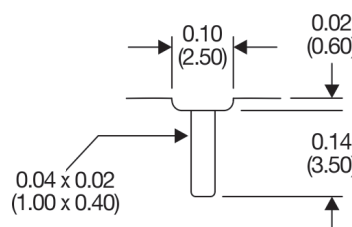

It is not required that the user connect the case ground tabs (9 & 10 on the mechanical diagram) to the PCB. However, connecting one or both tabs to a ground plane on the PCB will help:

- Improve the unit's resistance to vibration
- Improve the unit's ability to dissipate heat
- Improve the unit's resistance to ESD

Call the factory for more information

Notes:

- All dimensions are typical in inches (mm)
- Pin Section Tolerance x.xxx = ± 0.004 (± 0.100)
- General Tolerance x.xx = ± 0.01 (± 0.25)
- Pin 1 is marked by a "dot" or indentation on the top of the unit