


LF200RW Series

Miniature SMT, 2W Wide Input Range DC/DC Converters

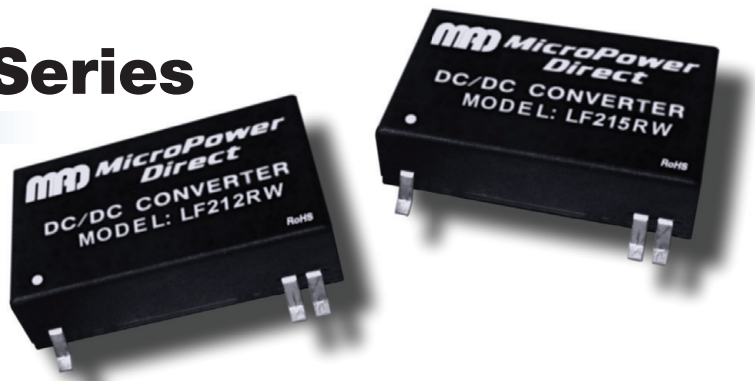

Key Features:

- 2W Output Power
- 2:1 Input Voltage Range
- 1,500 VDC Isolation
- Short Circuit Protected
- Miniature SMT Package
- Single & Dual Outputs
- 1.0 MH MTBF
- Industry Standard Pin-Out



Tape & Reel

MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerelectronics.com
W: www.micropowerelectronics.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Start Voltage	5 VDC Input	3.5	4.0	4.5	VDC	
	12 VDC Input	4.5	7.0	9.0		
	24 VDC Input	8.0	12.0	18.0		
	48 VDC Input	16.0	24.0	36.0		
Input Filter	π (Pi) Filter					
Reverse Polarity Input Current				1.0	A	
Short Circuit Input Power				1,500	mW	
Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage Accuracy			±1.0	±2.0	%	
Output Voltage Balance			±1.0	±2.0	%	
Line Regulation	V _{IN} = Min to Max		±0.3	±0.5	%	
Load Regulation	I _{OUT} = 25% to 100%		±0.5	±0.75	%	
Ripple & Noise (20 MHz)	See Note 2		30	50	mV P - P	
Ripple & Noise (20 MHz)	Over Line, Load & Temp.			75	mV P - P	
Ripple & Noise (20 MHz)				15	mV rms	
Output Power Protection		120			%	
Transient Response Time, See Note 3	50% Load Step Change		100	300	μSec	
Transient Response Deviation			±3.0	±5.0	%	
Temperature Coefficient			±0.01	±0.02	%/°C	
Output Short Circuit	Continuous (Autorecovery)					
General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage	60 Seconds	1,500			VDC	
Isolation Test Voltage	Flash Tested For 1 Sec	1,650			VDC	
Isolation Resistance	1,000 VDC	1,000			MΩ	
Isolation Capacitance	100 kHz, 1V		250	420	pF	
Switching Frequency			300		kHz	
Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	-40	+25	+65	°C	
Maximum Case Temperature	Case			+90	°C	
Storage Temperature Range		-40		+125	°C	
Cooling	Free Air Convection					
Humidity	RH, Non-condensing			95	%	
Physical						
Case Size	See Mechanical Drawing (Page 2)					
Case Material	Non-Conductive Black Plastic (UL94-V0)					
Weight	0.18 Oz (5.1g)					
Reliability Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.0			MHours	
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1			Level 2		
Absolute Maximum Ratings						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Surge (1 Sec)	5 VDC Input			11.0	VDC	
	12 VDC Input			25.0		
	24 VDC Input			50.0		
	48 VDC Input			100.0		
Peak Reflow Temperature	See Note 6			245	°C	
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C	
Internal Power Dissipation	All Models			1,800	mW	

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.


www.micropowerelectronics.com

Model Number	Input				Output			Reflected Ripple Current (mA)	Efficiency (% Typ)	Output Capacitive Load (μF, Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)				
	Nominal	Range	Full-Load	No-Load							
LF201RW	5	4.5 - 9.0	471	40	3.3	500.0	125.0	100	70	2,200	1,000
LF202RW	5	4.5 - 9.0	548	40	5.0	400.0	100.0	100	73	1,000	1,000
LF203RW	5	4.5 - 9.0	534	40	12.0	167.0	42.0	100	75	170	1,000
LF204RW	5	4.5 - 9.0	582	40	15.0	134.0	33.0	100	73	110	1,000
LF205RW	5	4.5 - 9.0	667	40	±5.0	±200.0	±50.0	100	64	470	1,000
LF206RW	5	4.5 - 9.0	615	40	±12.0	±83.0	±21.0	100	69	100	1,000
LF207RW	5	4.5 - 9.0	598	40	±15.0	±67.0	±17.0	100	71	47	1,000
LF211RW	12	9.0 - 18.0	184	20	3.3	500.0	125.0	25	73	2,200	500
LF212RW	12	9.0 - 18.0	217	20	5.0	400.0	100.0	25	77	1,000	500
LF213RW	12	9.0 - 18.0	209	20	12.0	167.0	42.0	25	80	170	500
LF214RW	12	9.0 - 18.0	220	20	15.0	134.0	33.0	25	80	110	500
LF215RW	12	9.0 - 18.0	242	20	±5.0	±200.0	±50.0	25	73	470	500
LF216RW	12	9.0 - 18.0	224	20	±12.0	±83.0	±21.0	25	78	100	500
LF217RW	12	9.0 - 18.0	226	20	±15.0	±67.0	±17.0	25	78	47	500
LF221RW	24	18.0 - 36.0	96	10	3.3	500.0	125.0	15	72	2,200	250
LF222RW	24	18.0 - 36.0	109	10	5.0	400.0	100.0	15	77	1,000	250
LF223RW	24	18.0 - 36.0	109	10	12.0	167.0	42.0	15	80	170	250
LF224RW	24	18.0 - 36.0	108	10	15.0	134.0	33.0	15	81	110	250
LF225RW	24	18.0 - 36.0	119	10	±5.0	±200.0	±50.0	15	74	470	250
LF226RW	24	18.0 - 36.0	112	10	±12.0	±83.0	±21.0	15	78	100	250
LF227RW	24	18.0 - 36.0	110	10	±15.0	±67.0	±17.0	15	80	47	250
LF231RW	48	36.0 - 72.0	49	8	3.3	500.0	125.0	10	71	2,200	120
LF232RW	48	36.0 - 72.0	57	8	5.0	400.0	100.0	10	73	1,000	120
LF233RW	48	36.0 - 72.0	53	8	12.0	167.0	42.0	10	79	170	120
LF234RW	48	36.0 - 72.0	55	8	15.0	134.0	33.0	10	79	110	120
LF235RW	48	36.0 - 72.0	62	8	±5.0	±200.0	±50.0	10	71	470	120
LF236RW	48	36.0 - 72.0	57	8	±12.0	±83.0	±21.0	10	77	100	120
LF237RW	48	36.0 - 72.0	57	8	±15.0	±67.0	±17.0	10	77	47	120


Notes:

- The specified maximum capacitive load is for each output.
- When measuring output ripple, it is recommended that an external 0.47 μF ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units. For noise sensitive applications, the use of 3.3 μF capacitors will reduce the output ripple.
- Transient recovery is measured to within a 1% error band for a load step change of 75% to 100%.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- The converter should be connected to a low ac-impedance source. An input source with a highly inductive impedance may affect the stability of the converter. In applications where the converter output loading is high and input power is supplied over long lines, it may be necessary to use a capacitor on the input to insure start-up. In this case, it is recommended that a low ESR (ESR <1.0Ω at 100 kHz) capacitor be mounted close to the converter. For 5V input units a 8.2 μF is recommended, for 12V input units, a 3.3 μF; and for 24V & 48V units a 1.5 μF.
- The recommended reflow settings are a peak temperature of 245 °C for a maximum period (T_{PK}) of 10S and a time above liquidous (T_L) of ≤60 seconds at 217 °C. For more information, please contact the factory.
- It's recommended that a fuse be used on the power supply input for protection. See the table above for the correct rating.

Derating Curve

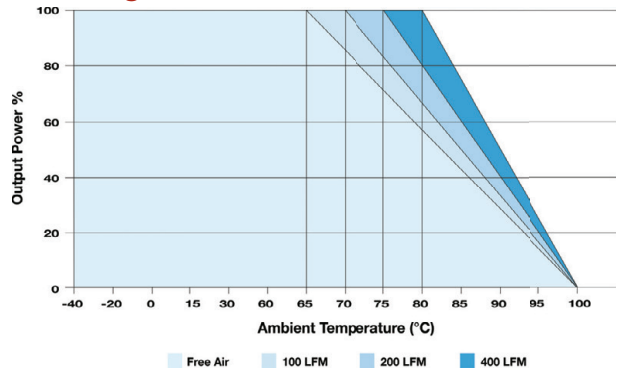

Mechanical Dimensions

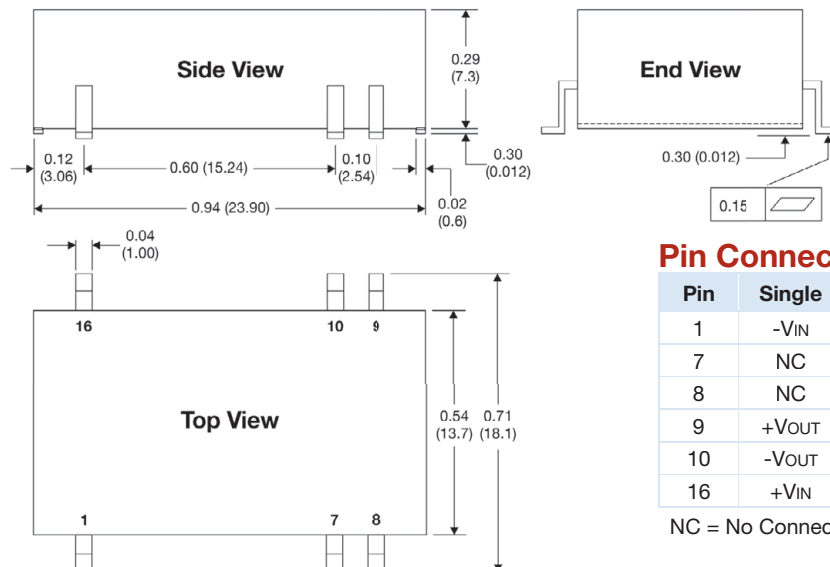


Pin Connections

Pin	Single	Dual
1	-VIN	-VIN
7	NC	NC
8	NC	Common
9	+VOUT	+VOUT
10	-VOUT	-VOUT
16	+VIN	+VIN

NC = No Connection

Solder Layout

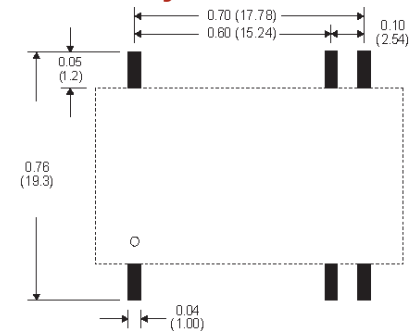

Mechanical Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.01 (±0.25)



MicroPower Direct
 We Power Your Success - For Less!